


VIKING

STAGE LIGHTING

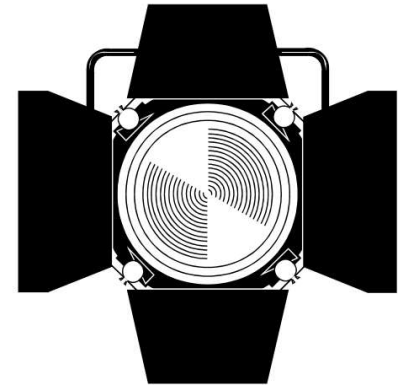

4 Cell LED Blinder Instruction Sheet

Manual Operation

Press **MODE** button to choose between **DMX** or the built in program patterns

Press **MENU** button to edit the program

Press the **UP** or **DOWN** buttons to adjust value

Menu	Sub Menu	Function
A***		DMX Mode Address 1-512
PR**	D***	Dimmer (brightness) value 0-255
	F***	Fade value 0-65 seconds
	S***	Interval time 32ms to 62 seconds
T***		Strobe Value 0-255
P***		Program Auto Mode
PR**		Sound activated and Auto Mode
L***		Display brightness (off after 3 sec)

When you choose Program 6-12 F*** and S*** are not available.

Master / Slave Mode

- 1) Each blinder should be set to **DMX** mode **and** address **A001**
- 2) Connect each blinder together with a DMX Cable
- 3) Set one of the blinders to run a program, this now becomes a master unit. The slave's signal LED light will now flash and run with the master at the same speed

16 Channel Mode DMX Assignments

DMX Channel	Attribute	Value in DMX	Value in %
1	Activates Cells Below	16-49	7 - 19 %
2	Rolling Effect	0 - 22	0 - 8 %
	Flowing Effect	23 - 45	9 - 17 %
	Recycling Flowing Fx	46 - 68	18 - 26 %
	Recycling Chase	69 - 91	27 - 35 %
	Recycling Chase	92 - 114	36 - 44 %
	All Red	115 - 137	45 - 53 %
	All Green	138 - 160	54 - 62 %
	All Blue	161 - 183	63 - 71 %
	All Yellow	184 - 206	72 - 80 %
	All Purple	207 - 229	81 - 90 %
	All Cyan	230 - 252	91 - 99 %
	All White	253 - 255	100 %
3	Strobe Off	0 - 15	0 - 6 %
	1 - 20Hz	16 - 200	7 - 78 %
	Random Slow	201 - 210	79 - 83 %
	Random Medium	211 - 220	84 - 85 %
	Random Fast	221 - 230	86 - 90 %
	Strobe Off	231 - 255	91 - 100 %
4	4 Cell Master Dimmer	0 - 255	0 - 100 %
5	Cell 1 Red	0 - 255	0 - 100 %
6	Cell 1 Green	0 - 255	0 - 100 %
7	Cell 1 Blue	0 - 255	0 - 100 %
8	Cell 2 Red	0 - 255	0 - 100 %
9	Cell 2 Green	0 - 255	0 - 100 %
10	Cell 2 Blue	0 - 255	0 - 100 %
11	Cell 3 Red	0 - 255	0 - 100 %
12	Cell 3 Green	0 - 255	0 - 100 %
13	Cell 3 Blue	0 - 255	0 - 100 %
14	Cell 4 Red	0 - 255	0 - 100 %
15	Cell 4 Green	0 - 255	0 - 100 %
16	Cell 4 Blue	0 - 255	0 - 100 %